



GENERAL

The automatic drain valve collects and drains, by means of a built-in automatic valve, water within compressed air systems. For a longer lifetime of the automatic drain valve, the unit includes a 55µm filter element to strain main condensates.

MOUNTING

The auto drain valve must be fitted vertically, at the lowest point of the air system

SPECIFICATIONS

FLUID : Compressed air
 CONNECTION : G 1/2
 MAX. PRESSURE : 16 bar at 50°C
 PRESSURE RANGE : 1 to 16 bar



CONSTRUCTION

Body : aluminium
 Automatic drain valve : POM, nitrile, aluminium, stainless steel
 Filter element (55µm) : polyester and stainless steel
 Bowl : polycarbonate - **For maintenance : never use a solvent. Use an alkaline solution** (soapy water)

CHOICE OF EQUIPMENT


Ø connection	Pressure range	CODE
G 1/2	1 - 16 bar	34201471

SPARE PARTS

55 µm filter element for automatic drain valve - code : **97801528**
 To remove the filter element, first close the air inlet then press the unlocking button (the bowl is automatically vented to atmosphere) and unscrew the bowl 1/4 a turn to open it.

DIMENSIONS AND WEIGHT

Weight : 0,570 Kg

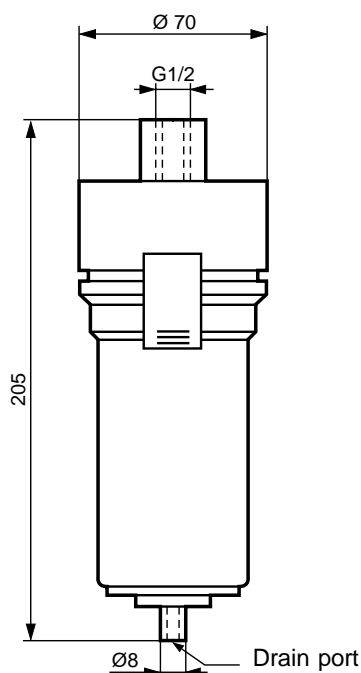

MOUNTING

(at the lowest point of the air system)

